



VE SINGLE EXTRACTOR HOSE

14-01

MODELS & OPTIONS:

00000

CUSTOMER P.O.:

IDENTIFICATION / TAGGING:

CUSTOMER:

PROJECT:

ENGINEER:

SALES REP.:


		Part #	Description	
NS:		Low Temp Hose	a Dron	
		SES-4-LT	4" VE single exhaust extractor 6m (20 ft.) 250°F hose, strap and saddle	
		SES-5-LT	5" VE single exhaust extractor 6m (20 ft.) 250°F hose, strap and saddle	
		SES-6-LT	6" VE single exhaust extractor 6m (20 ft.) 250°F hose, strap and saddle	
		SES-8-LT	8" VE single exhaust extractor 6m (20 ft.) 250°F hose, strap and saddle	
			· · _ · · · · · · · · · · · · · · · · ·	
		High Temp Hose	e Drop	
		SES-4-HT	4" VE single exhaust extractor 6m (20 ft.) 600°F hose, strap and saddle	
		SES-5-HT	5" VE single exhaust extractor 6m (20 ft.) 600°F hose, strap and saddle	
		SES-6-HT	6" VE single exhaust extractor 6m (20 ft.) 600°F hose, strap and saddle	
		SES-8-HT	8" VE single exhaust extractor 6m (20 ft.) 600°F hose, strap and saddle	
		Dubbor Tailaina	Adaptore alw Vice Crip (Suitable for Bound or Ovel Tailainee)	
		SRF-4/D	Adapters c/w Vice Grip (Suitable for Round or Oval Tailpipes)	
		SRF-5/D	4" Rubber nozzle with vice grip and automatic damper - 6" opening	
		SRF-6/D	5" Rubber nozzle with vice grip and automatic damper - 8" opening	
	H—	SRF-0/D SRF-4	6" Rubber nozzle with vice grip and automatic damper - 8" opening	
	H—		4" Rubber nozzle with vice grip - 6" opening	
	Η	SRF-5 SRF-6	5" Rubber nozzle with vice grip - 8" opening 6" Rubber nozzle with vice grip - 8" opening	
	<u> </u>	SRI-0	6 Rubbel hozzle with vice grip - 8 opening	
		Over-head Stac	k adapter - High Temperature Rubber	
		RCA-5	5" Diesel Stack Adapter - 10" opening for exhaust pipe	
		RCA-6	6" Diesel Stack Adapter - 10" opening for exhaust pipe	
		RCA-8	8" Diesel Stack Adapter - 10" opening for exhaust pipe	
		Nozzle Accesso TP-6-12	6' - 12' Telescoping Pole	
		Hose, Hood & N	ozzle Options	
		P-230	Hose holder for mounting on OM-092 Fan Mounting Bracket or directly to a wall. For max 150mm hose.	
		Fane Single St	ation and/or Direct Mount (Motor Starter not included)	
		P-147	P-Max direct drive fan 0.5 HP 115V/1/60.	
		P-149-1	P-Max® direct drive fan 1 HP 115/1/60	
		P-152-1	P-Max© direct drive fan 1.5 HP 115/230/1/60	
	_	<u> Hose Clamps - I</u>	Bridge Type (Necessary to go over the helix of the hose)	
		MD-530-100-100	4" Ø Bridge Clamp. Clamping range of 100mm-120mm	
		MD-530-125-100	5" Ø Bridge Clamp. Clamping range of 120mm-140mm	
		MD-530-150-100	6" Ø Bridge Clamp. Clamping range of 150mm-170mm	
		MD-530-200-100	8" Ø Bridge Clamp. Clamping range of 200mm-220mm	
		Fan Control Dan	els (when ordering main unit)	
		Tancontrol Pan	115V/1/60 Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection on/off	i
		P-024-1	control power cord and plug. Overload rating according to the FLA of the motor. Field installation required.	
	_	Fan Mounting Bi OM-092	rackets P-Max Fan/Duct mounting bracket for 2 x 150mm (6")Ø Hoses c/w 150/160 mm (6"/6.33") hose/duct connection. Package contair	ne.
	LI	JII-032	י האמיר מהיציעני חוסטומוווין טימטאפרוטי צ'א רסטווווי (ט ש הטפיט עש רסטי וטע חוווי (ט וט.כס) חטפויטעני נטווויפטוטו. Package contait	10.
			Plastic cover (Block end) in cases where only one hose is used	
			2 - 5" Ø reducers for connections to 5" Ø hoses 2 - 4" Ø reducers for connections to 4" Ø hoses	
	-			<u> </u>
			The of embody and the second se	
	· · · · · · · · · · · · · · · · · · ·			

> www.lev-co.com • 1.888.862.5356

The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

lev-co

DUST COLLECTION . FUME EXTRACTION . OIL MIST FILTRATION . VEHICLE EXHAUST

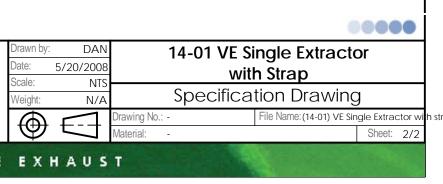

14-01