

SPECIFICATIONS:

CONSTRUCTION: 18 Gauge painted steel cabinet – brown epoxy powder coat, direct drive 9 x 9 blower w/4-way adjustable airfoil blade discharge grille, end loading of filter assemblies, 10' power cord and running indicator light. Includes wall bracket for mounting.

WEIGHT: 81 lbs.

AIRFLOW: 1000 CFM (HI), 800 CFM (MED), 700 CFM (LOW)

ELECTRICAL: 1/8 HP, 115/1/60, 1.7 amps, 3 speed, std.
 1/3 HP, 220V, 50HZ, 825/1075 rpm, 2 speed, opt.

NOISE: 56 dBA (HI), 51 dBA (MED), 48 dBA (LOW) w/ Silencer = 54 dBA, 49 dBA, 46 dBA

FIRE SUPPRESSION: Equipment provided by others.

PREFILTERS: (1) 1" washable urethane foam, std.
 (1) reduced maintenance, 4.2 ft², opt.


MAIN FILTERS: (1) 39 ft² 95% bag, std.
 (1) HEPA, 99.97% D.O.P., opt.
 (1) Easy clean, 95%, opt.

AFTER FILTERS: (1) 1/2" charcoal, std.
 (1) 2" charcoal, opt.

AD OPTION: (1) v-bank refillable adsorber module, 15 lb., and 2" final pleated filter, 60%, in place of bag filter, opt.

THIS UNIT CAN BE FLIPPED FOR LEFT TO RIGHT AIRFLOW

* AFS FILTER EFFICIENCIES BASED ON ASHRAE 52-76 TEST METHOD

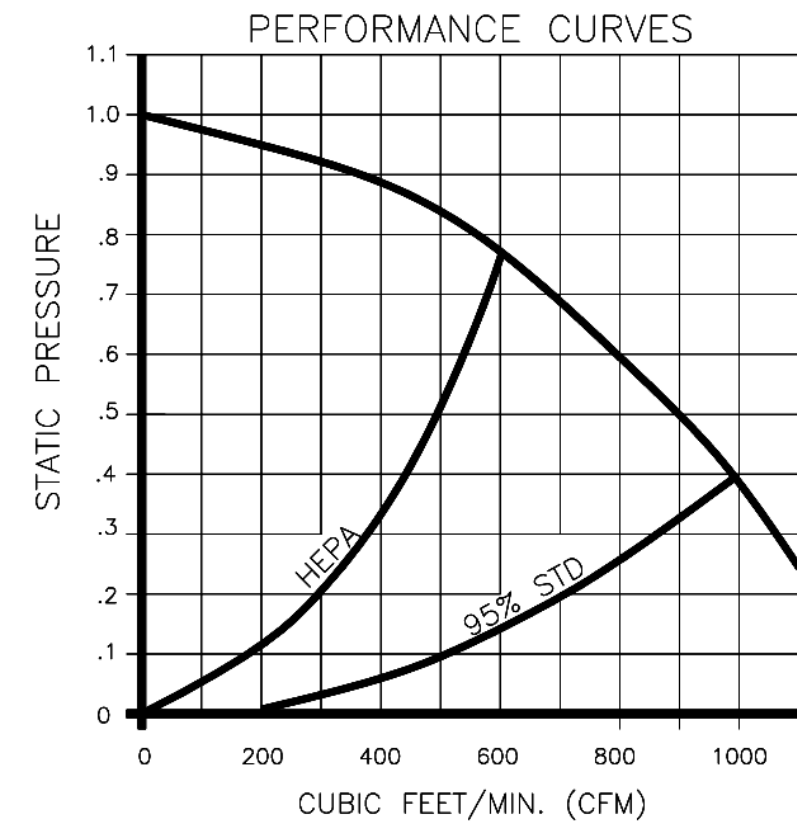

NOTES:

ITEMS DESIGNATED AS ARE INCLUDED IN THIS PROPOSAL.

CUSTOMER:	
CUSTOMER P.O.:	
PROJECT:	
ENGINEER:	
SALES REP.:	
IDENTIFICATION / TAGGING:	

www.lev-co.com • 1.888.862.5356



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	Janos B
Date:	11/28/2008
Scale:	NTS
Weight:	N/A

1000	
"THROW-AWAY" FILTER	
Specification Drawing	
Drawing No.:	File Name: 1000 - SD
Material:	Sheet: 1/1