


PRO-FLEX 2, 3 and 4m version

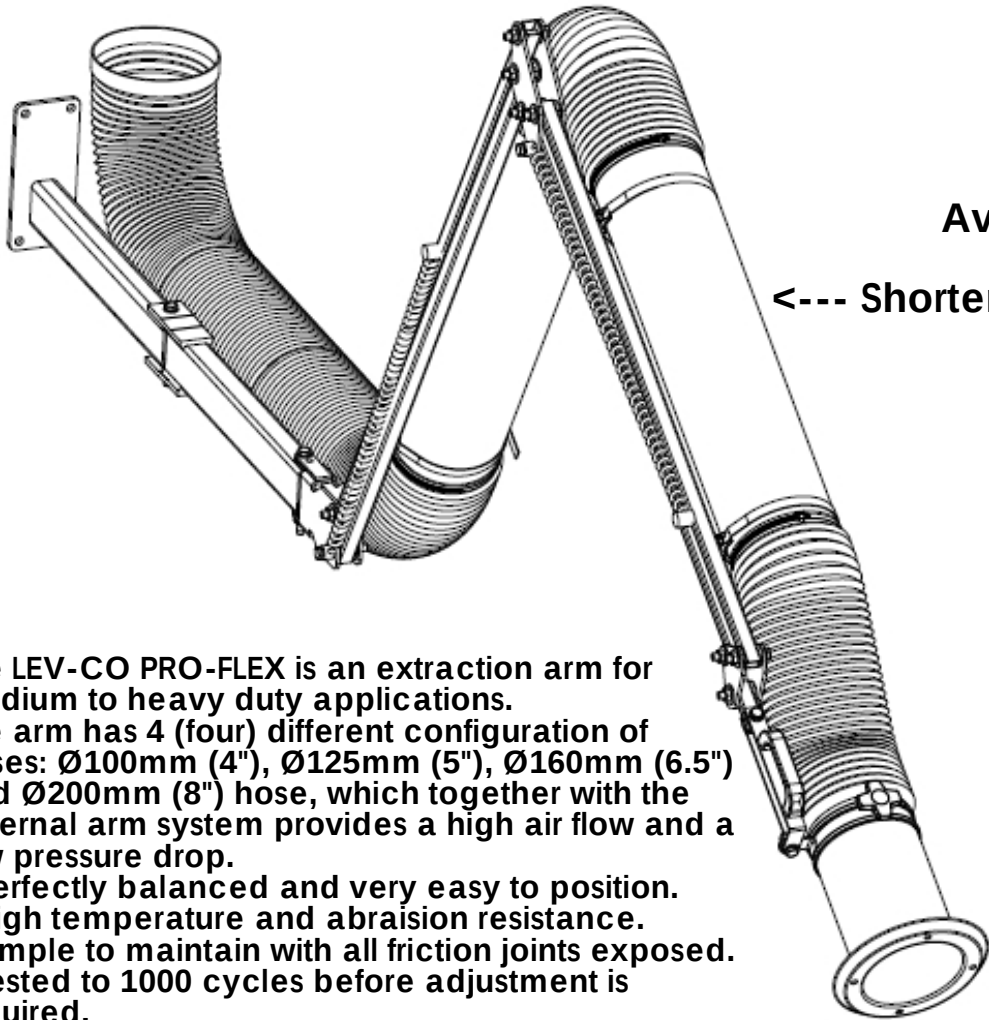


The LEV-CO PRO-FLEX is an extraction arm for medium to heavy duty applications. The arm has 4 (four) different configuration of hoses: Ø100mm (4"), Ø125mm (5"), Ø160mm (6.5") and Ø200mm (8") hose, which together with the external arm system provides a high air flow and a low pressure drop.

- Perfectly balanced and very easy to position.
- High temperature and abraision resistance.
- Simple to maintain with all friction joints exposed.
- Tested to 1000 cycles before adjustment is required.

DESCRIPTION	REACH m (ft)	AIR FLOW m3/h (CFM)	Connection Ø mm (in)	Max. Fume Temp. °C (°F)	Noise level at hood	Weight kg (lbs)	Part number
PRO-2m	2 (6.5)	850 (500)	100 (4)	120 (250)	66	20 (44)	PRO-100-2M
		1150 (675)	125 (5)			20 (44)	PRO-125-2M
		1525 (900)	160 (6.5)			21 (46)	PRO-160-2M
		2125 (1250)	200 (8)			21(46)	PRO-200-2M
PRO-3m	3 (10)	850 (500)	100 (4)	120 (250)	63	24 (53)	PRO-100-3M
		1150 (675)	125 (5)			24 (53)	PRO-125-3M
		1525 (900)	160 (6.5)			25 (55)	PRO-160-3M
		2125 (1250)	200 (8)			25 (55)	PRO-200-3M
PRO-4m	4 (13)	850 (500)	100 (4)	120 (250)	63	28 (62)	PRO-100-4M
		1150 (675)	125 (5)			28 (62)	PRO-125-4M
		1525 (900)	160 (6.5)			29 (64)	PRO-160-4M
		2125 (1250)	200 (8)			29 (64)	PRO-200-4M

PRO-FLEX 5, 6, 7, 8 and 9m version

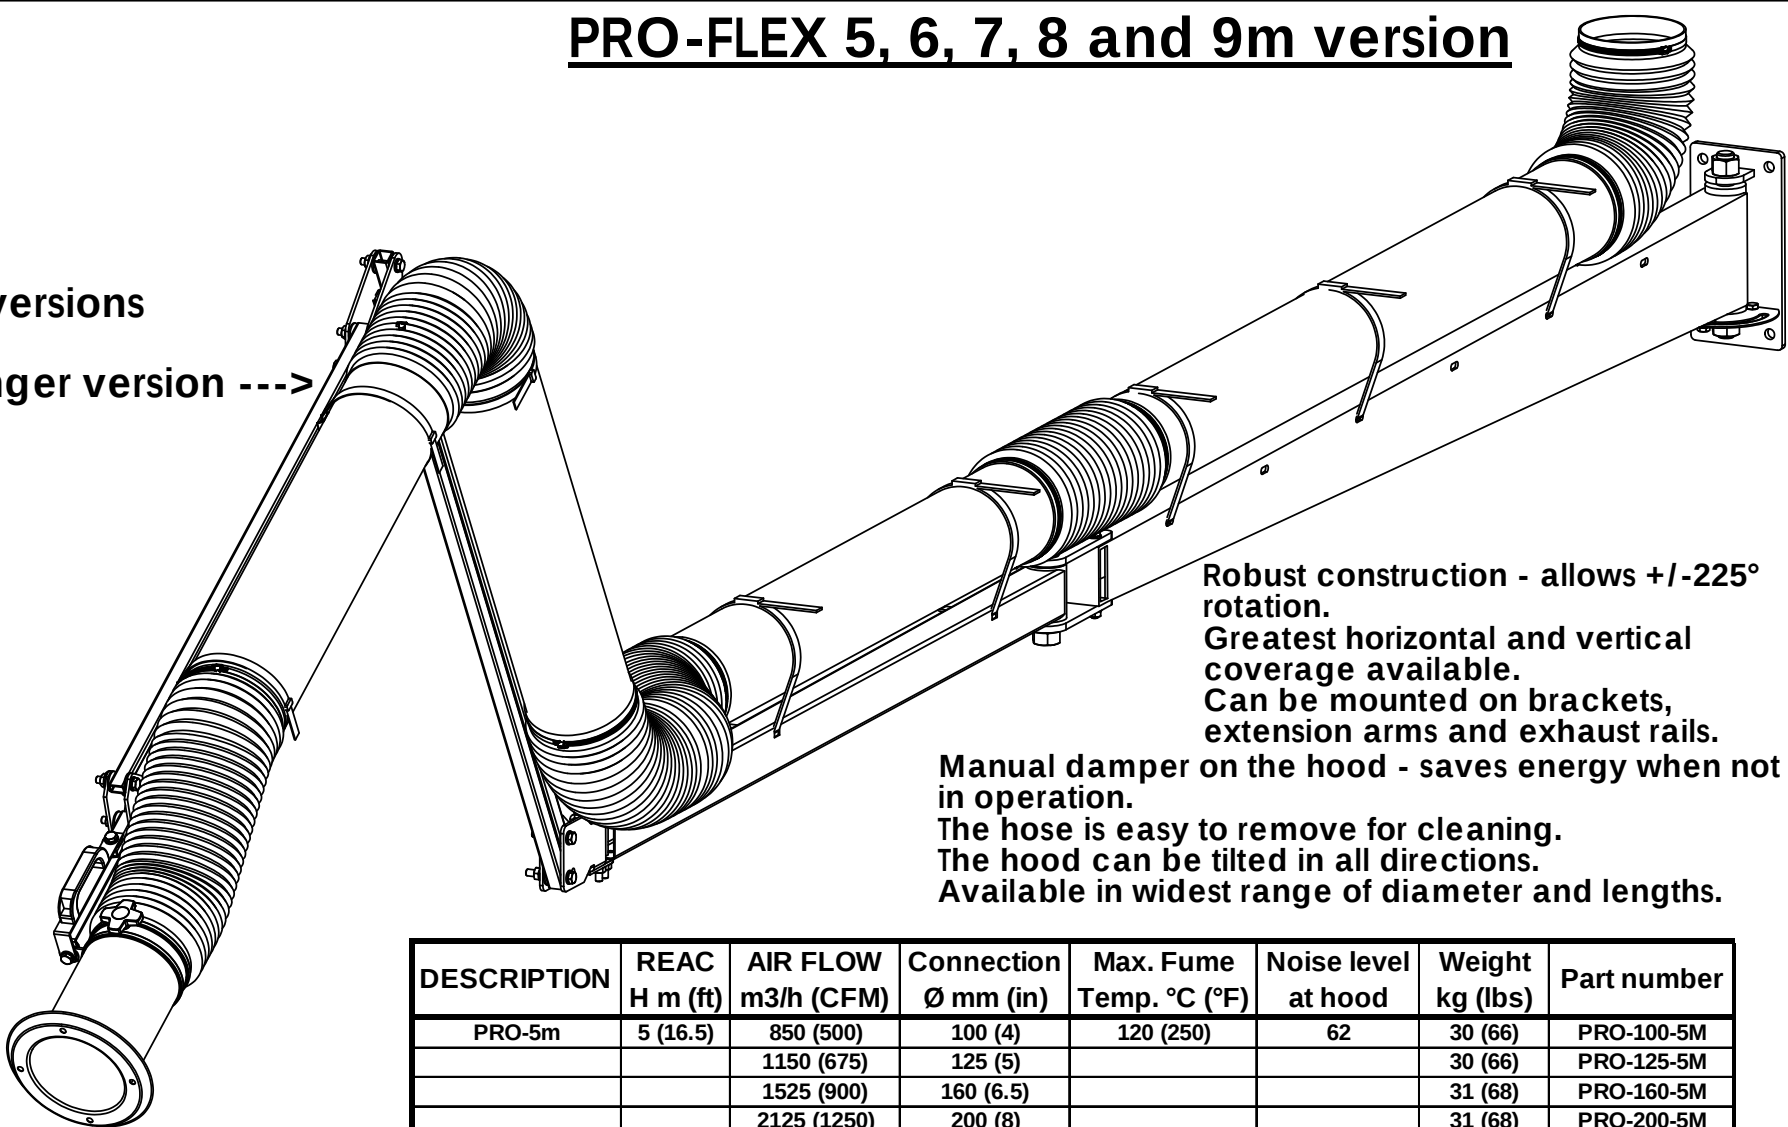

Available in two versions
<--- Shorter version | Longer version --->

Robust construction - allows +/-225° rotation.
Greatest horizontal and vertical coverage available.
Can be mounted on brackets, extension arms and exhaust rails.

Manual damper on the hood - saves energy when not in operation.
The hose is easy to remove for cleaning.
The hood can be tilted in all directions.
Available in widest range of diameter and lengths.

DESCRIPTION	REAC H m (ft)	AIR FLOW m3/h (CFM)	Connection Ø mm (in)	Max. Fume Temp. °C (°F)	Noise level at hood	Weight kg (lbs)	Part number
PRO-5m	5 (16.5)	850 (500)	100 (4)	120 (250)	62	30 (66)	PRO-100-5M
		1150 (675)	125 (5)			30 (66)	PRO-125-5M
		1525 (900)	160 (6.5)			31 (68)	PRO-160-5M
		2125 (1250)	200 (8)			31 (68)	PRO-200-5M
PRO-6m	6 (19.5)	850 (500)	100 (4)	120 (250)	62	33 (73)	PRO-100-6M
		1150 (675)	125 (5)			33 (73)	PRO-125-6M
		1525 (900)	160 (6.5)			34 (75)	PRO-160-6M
		2125 (1250)	200 (8)			34 (75)	PRO-200-6M
PRO-7m	7 (23)	850 (500)	100 (4)	120 (250)	62	36 (79)	PRO-100-7M
		1150 (675)	125 (5)			36 (79)	PRO-125-7M
		1525 (900)	160 (6.5)			37 (81)	PRO-160-7M
		2125 (1250)	200 (8)			37 (81)	PRO-200-7M
PRO-8m	8 (26)	850 (500)	100 (4)	120 (250)	62	39 (85)	PRO-100-8M
		1150 (675)	125 (5)			39 (85)	PRO-125-8M
		1525 (900)	160 (6.5)			40 (87)	PRO-160-8M
		2125 (1250)	200 (8)			40 ((87)	PRO-200-8M
PRO-9m	9 (29.5)	850 (500)	100 (4)	120 (250)	61	42 (93)	PRO-100-9M
		1150 (675)	125 (5)			42 (93)	PRO-125-9M
		1525 (900)	160 (6.5)			43 (94)	PRO-160-9M
		2125 (1250)	200 (8)			43 (94)	PRO-200-9M

CUSTOMER:

CUSTOMER P.O.:

PROJECT:

ENGINEER:

SALES REP.:

IDENTIFICATION / TAGGING:

www.lev-co.com • 1.888.862.5356




The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: Janos B

Date: 1/7/2010

Scale: NTS

Weight: N/A



(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit

Specification Drawing


Drawing No.: -

Material: -


File Name: (01-05) Pro-Flex - All Applications

Sheet: 1/9

OPTIONAL STANCHION FOR PRO-FLEX ARMS

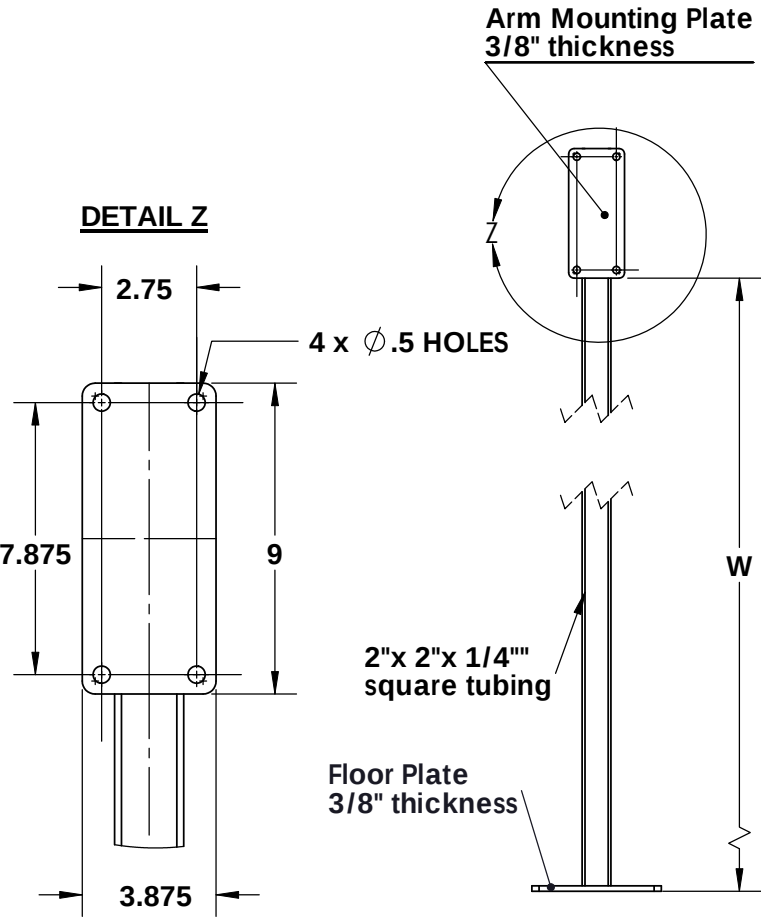


Vertical Range of Motion

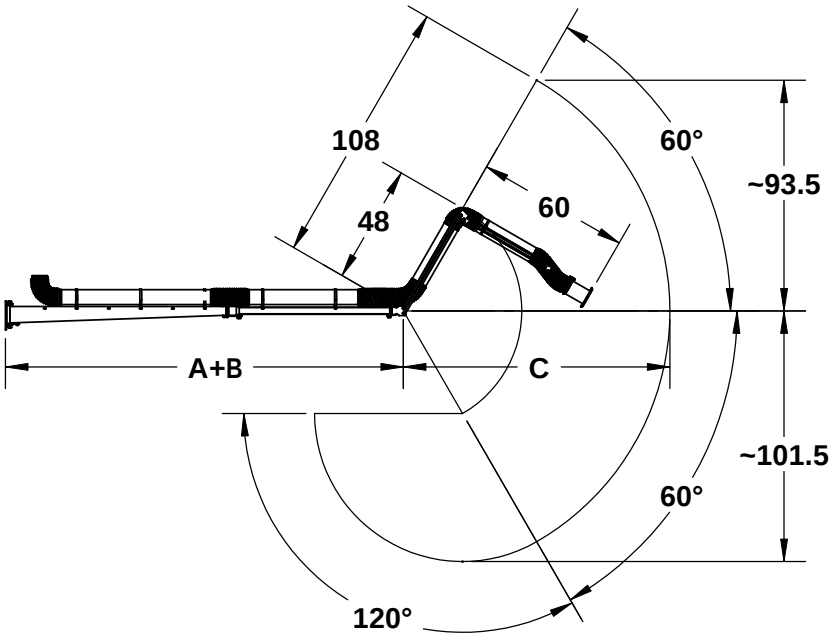


ARM	A(ft)	B(ft)	C(ft)
PRO-2m	1.5	N/A	6.5
PRO-3m	1.5	N/A	10
PRO-4m	1.5	1.5	10
PRO-5m	4.3	2.3	10
PRO-6m	7.5	2.3	10
PRO-7m	7.5	5.5	10
PRO-8m	10.8	5.5	10
PRO-9m	10.8	8.8	10


Horizontal Range of Motion

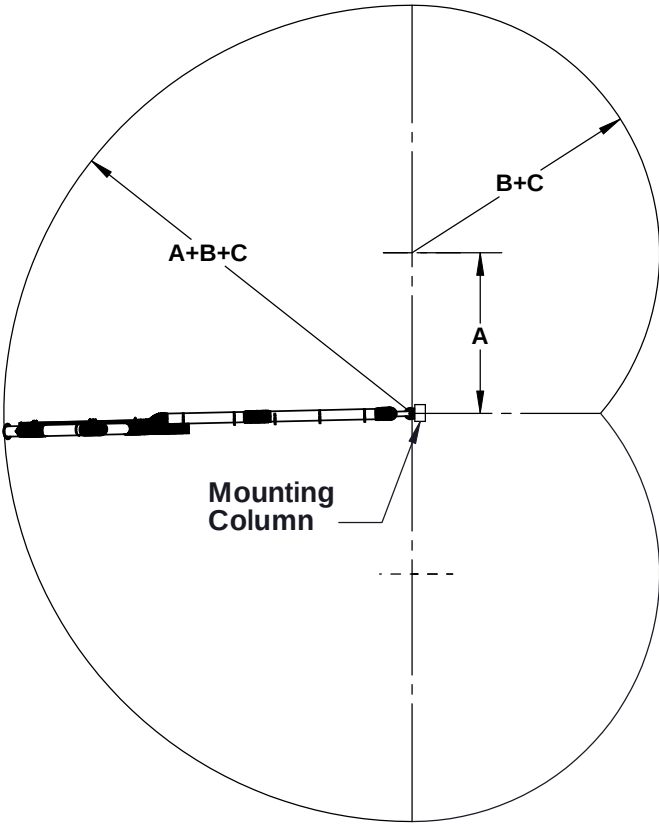

Articulating Arm with Mounting Flange
(FOR PRO-FLEX - 5, 6, 7, 8, 9m)

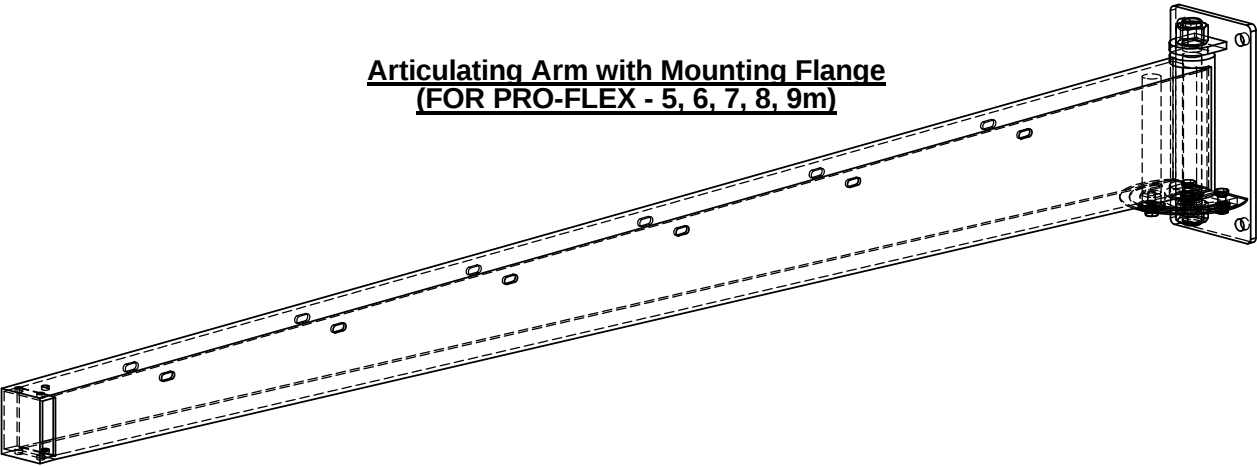

	W
P-021	1m (3.3')
P-022	2m (6.5')
P-023	3m (10')

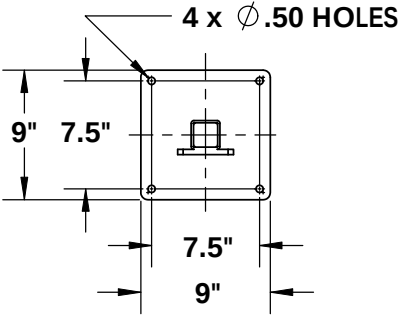

CUSTOMER: _____

CUSTOMER P.O.: _____

PROJECT: _____

ENGINEER: _____

SALES REP.: _____

IDENTIFICATION / TAGGING: _____



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: Janos B

Date: 1/7/2010

Scale: NTS

Weight: N/A

(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit

Specification Drawing



Drawing No.: -

Material: -

File Name: (01-05) Pro-Flex - All Applications

Sheet: 2/9

DIMENSIONS AND VERSIONS FOR PRO-FLEX 2m to 4m

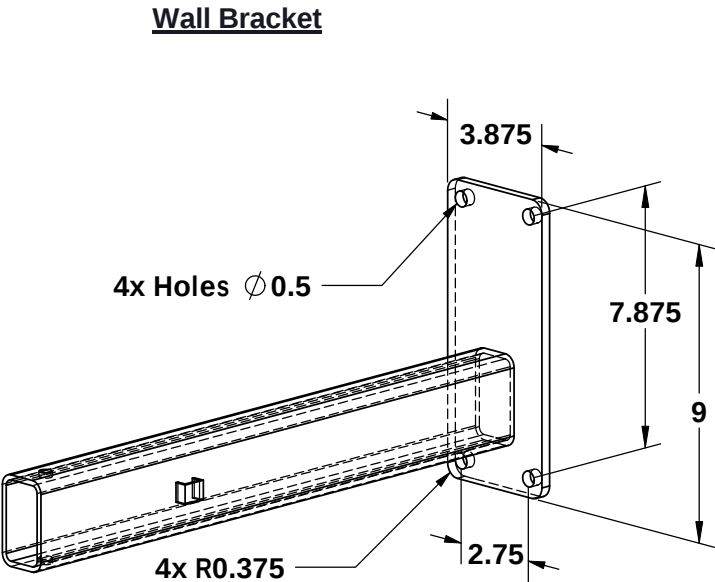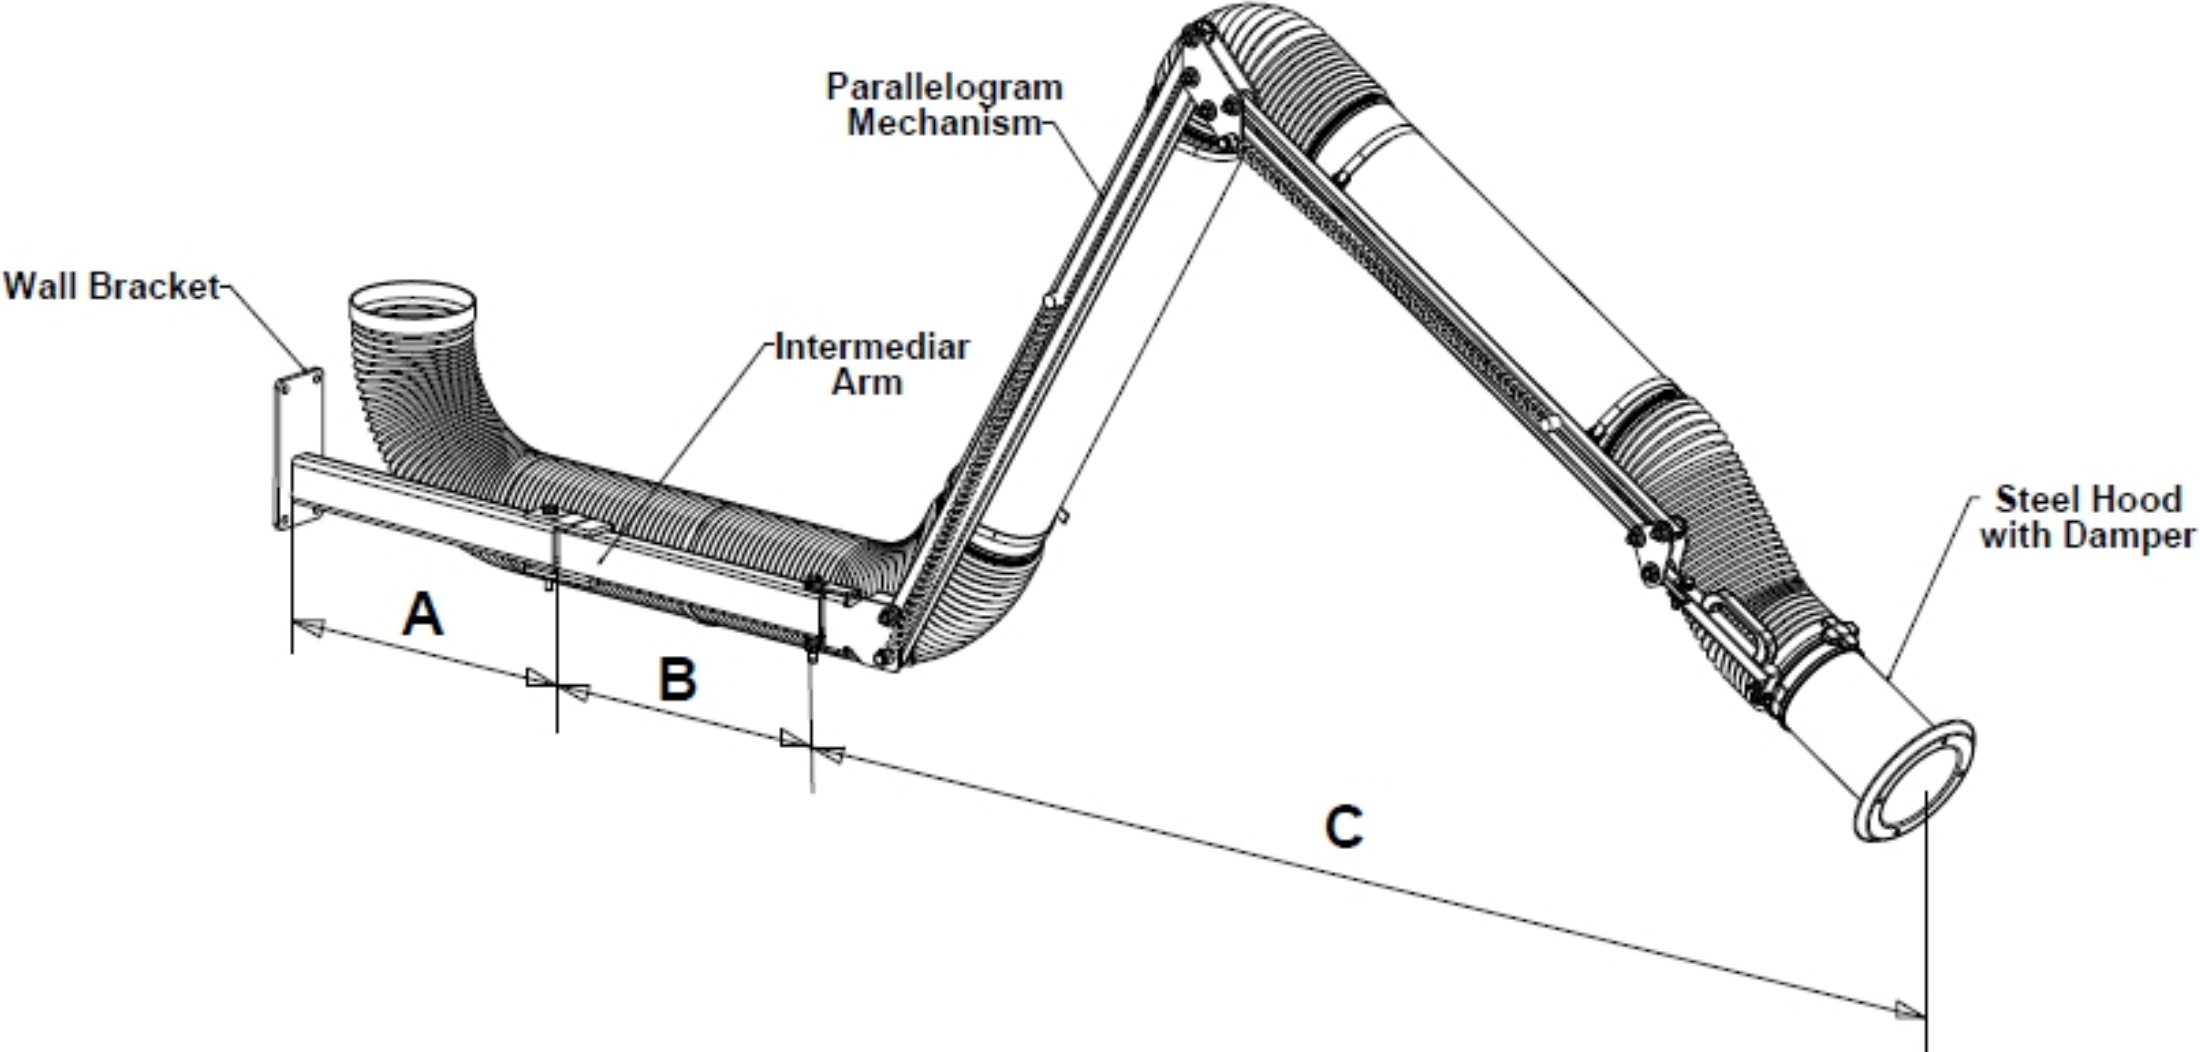

PRO	A	B	C
2m	1.5 Ft	N/A	6.5 Ft
3m	1.5 Ft	N/A	10 Ft
4m	1.5 Ft	1.5 Ft	10 Ft

CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:

www.lev-co.com • 1.888.862.5356




The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	Janos B
Date:	1/7/2010
Scale:	NTS
Weight:	N/A

(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit	
Specification Drawing	
Drawing No.: -	File Name: (01-05) Pro-Flex - All Applications
Material: -	Sheet: 3/9

DIMENSIONS AND VERSIONS FOR PRO-FLEX 5m AND LARGER

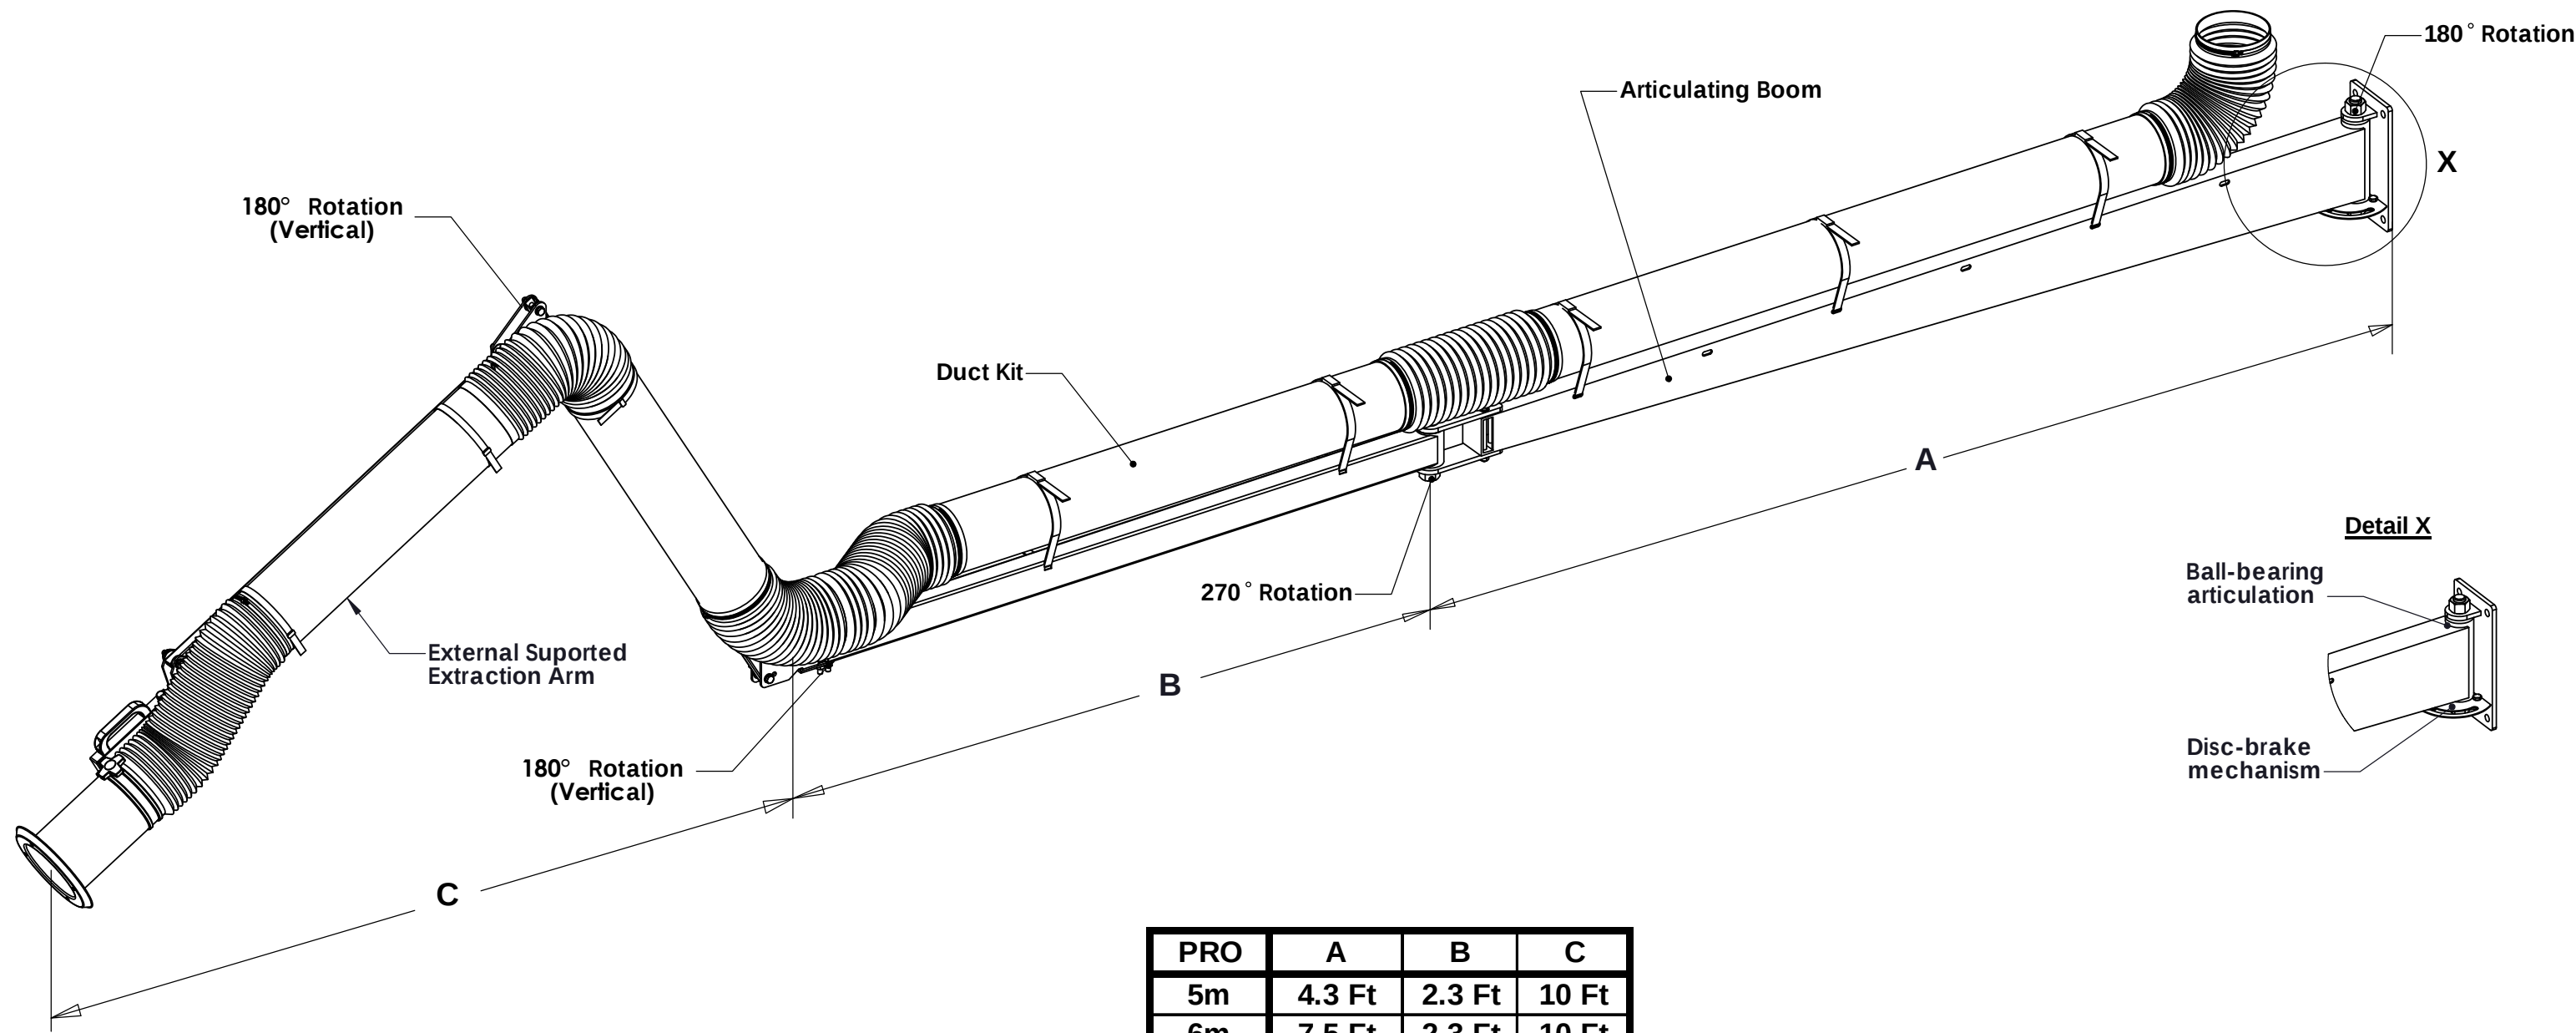

PRO	A	B	C
5m	4.3 Ft	2.3 Ft	10 Ft
6m	7.5 Ft	2.3 Ft	10 Ft
7m	7.5 Ft	5.5 Ft	10 Ft
8m	10.8 Ft	5.5 Ft	10 Ft
9m	10.8 Ft	8.8 Ft	10 Ft


CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	Janos B
Date:	1/7/2010
Scale:	NTS
Weight:	N/A

(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit	
Specification Drawing	
Drawing No.: -	File Name: (01-05) Pro-Flex - All Applications
Material: -	Sheet: 4/9

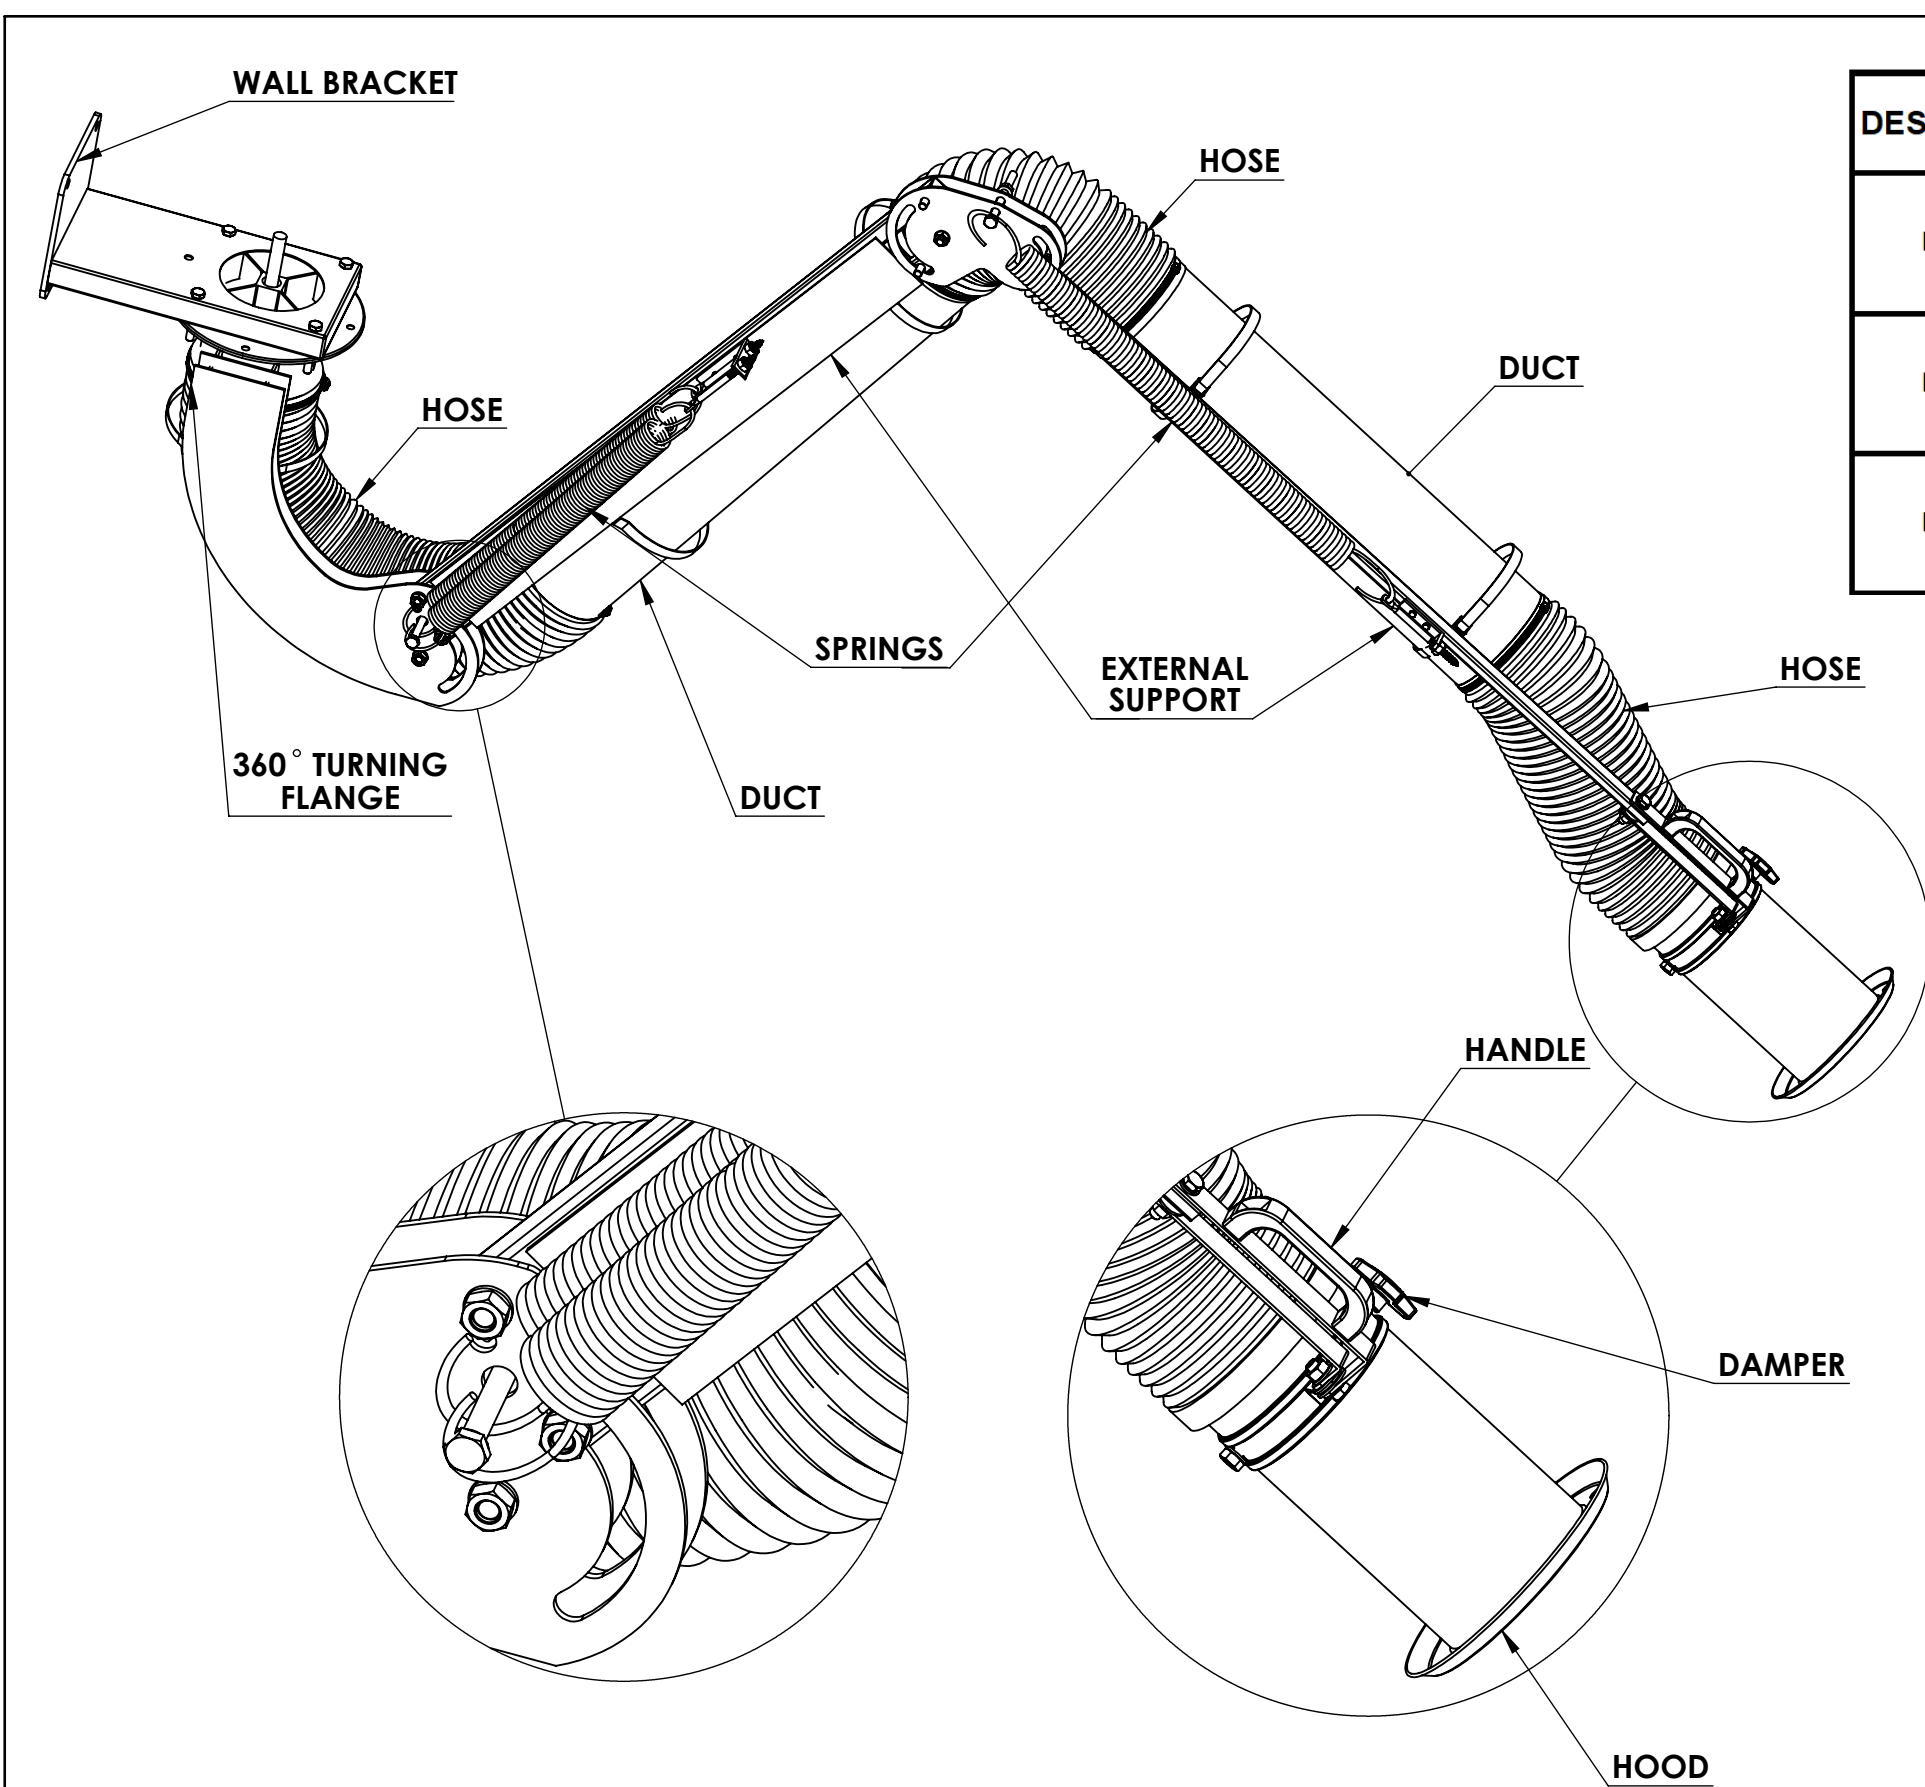

DESCRIPTION	REACH m (ft)	AIR FLOW m3/h (CFM)	Connection Ø mm (in)	Max. Fume Temp. °C (°F)	Noise level at hood	Weight kg (lbs)	Part number
PRO-2m	2 (6.5)	850 (500)	100 (4)	120 (250)	66	20 (44)	PRO-100-2M-PRSV
		1150 (675)	125 (5)			20 (44)	PRO-125-2M-PRSV
		1525 (900)	160 (6.5)			21 (46)	PRO-160-2M-PRSV
		2125 (1250)	200 (8)			21(46)	PRO-200-2M-PRSV
PRO-3m	3 (10)	850 (500)	100 (4)	120 (250)	63	24 (53)	PRO-100-3M-PRSV
		1150 (675)	125 (5)			24 (53)	PRO-125-3M-PRSV
		1525 (900)	160 (6.5)			25 (55)	PRO-160-3M-PRSV
		2125 (1250)	200 (8)			25 (55)	PRO-200-3M-PRSV
PRO-4m	4 (13)	850 (500)	100 (4)	120 (250)	63	28 (62)	PRO-100-4M-PRSV
		1150 (675)	125 (5)			28 (62)	PRO-125-4M-PRSV
		1525 (900)	160 (6.5)			29 (64)	PRO-160-4M-PRSV
		2125 (1250)	200 (8)			29 (64)	PRO-200-4M-PRSV

DESCRIPTION	REACH m (ft)	AIR FLOW m3/h (CFM)	Connection Ø mm (in)	Max. Fume Temp. °C (°F)	Noise level at hood	Weight kg (lbs)	Part number
PRO-5m	5 (16.5)	850 (500)	100 (4)	120 (250)	62	30 (66)	PRO-100-5M-PRSV
		1150 (675)	125 (5)			30 (66)	PRO-125-5M-PRSV
		1525 (900)	160 (6.5)			31 (68)	PRO-160-5M-PRSV
		2125 (1250)	200 (8)			31 (68)	PRO-200-5M-PRSV
PRO-6m	6 (19.5)	850 (500)	100 (4)	120 (250)	62	33 (73)	PRO-100-6M-PRSV
		1150 (675)	125 (5)			33 (73)	PRO-125-6M-PRSV
		1525 (900)	160 (6.5)			34 (75)	PRO-160-6M-PRSV
		2125 (1250)	200 (8)			34 (75)	PRO-200-6M-PRSV
PRO-7m	7 (23)	850 (500)	100 (4)	120 (250)	62	36 (79)	PRO-100-7M-PRSV
		1150 (675)	125 (5)			36 (79)	PRO-125-7M-PRSV
		1525 (900)	160 (6.5)			37 (81)	PRO-160-7M-PRSV
		2125 (1250)	200 (8)			37 (81)	PRO-200-7M-PRSV
PRO-8m	8 (26)	850 (500)	100 (4)	120 (250)	62	39 (85)	PRO-100-8M-PRSV
		1150 (675)	125 (5)			39 (85)	PRO-125-8M-PRSV
		1525 (900)	160 (6.5)			40 (87)	PRO-160-8M-PRSV
		2125 (1250)	200 (8)			40 ((87)	PRO-200-8M-PRSV
PRO-9m	9 (29.5)	850 (500)	100 (4)	120 (250)	61	42 (93)	PRO-100-9M-PRSV
		1150 (675)	125 (5)			42 (93)	PRO-125-9M-PRSV
		1525 (900)	160 (6.5)			43 (94)	PRO-160-9M-PRSV
		2125 (1250)	200 (8)			43 (94)	PRO-200-9M-PRSV

CUSTOMER:

CUSTOMER P.O.:

PROJECT:

ENGINEER:

SALES REP.:

IDENTIFICATION / TAGGING:

>

www.lev-co.com • 1.888.862.5356

lev-co

The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: Janos B

Date: 1/7/2010

Scale: NTS

Weight: N/A

(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit

Specification Drawing

Drawing No.: -





File Name: (01-05) Pro-Flex - All Applications

Material: -

Sheet: 5/9

DUST COLLECTION • FUME EXTRACTION • OIL MIST FILTRATION • VEHICLE EXHAUST

PERFORMANCE CURVES

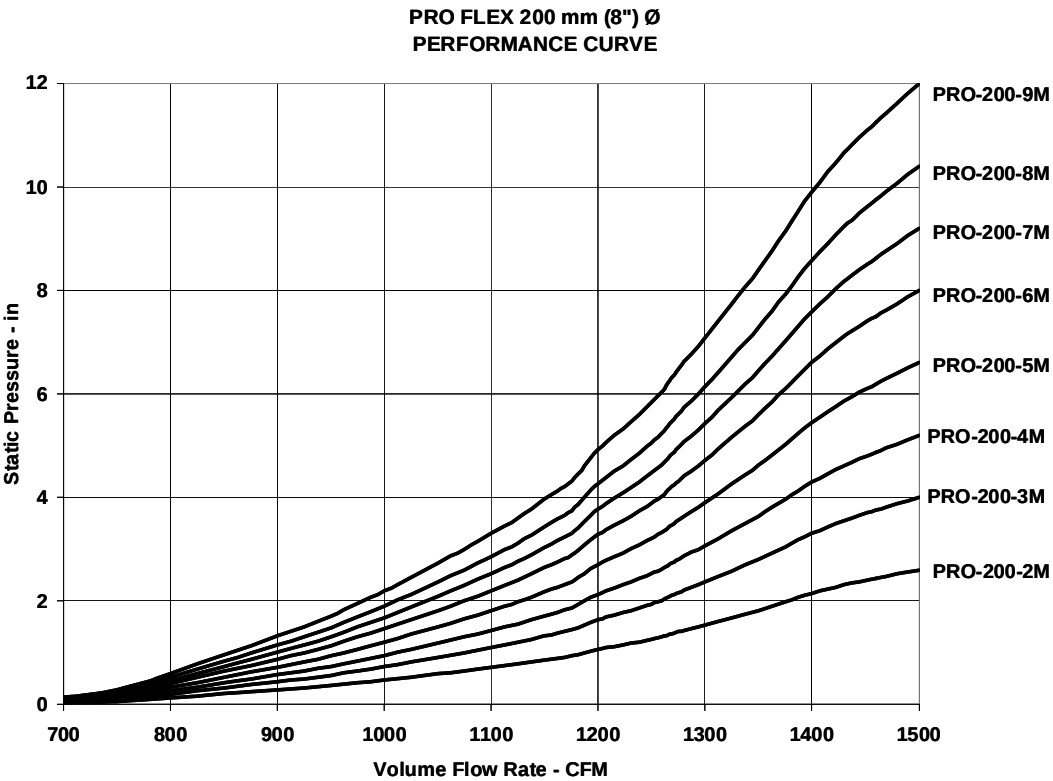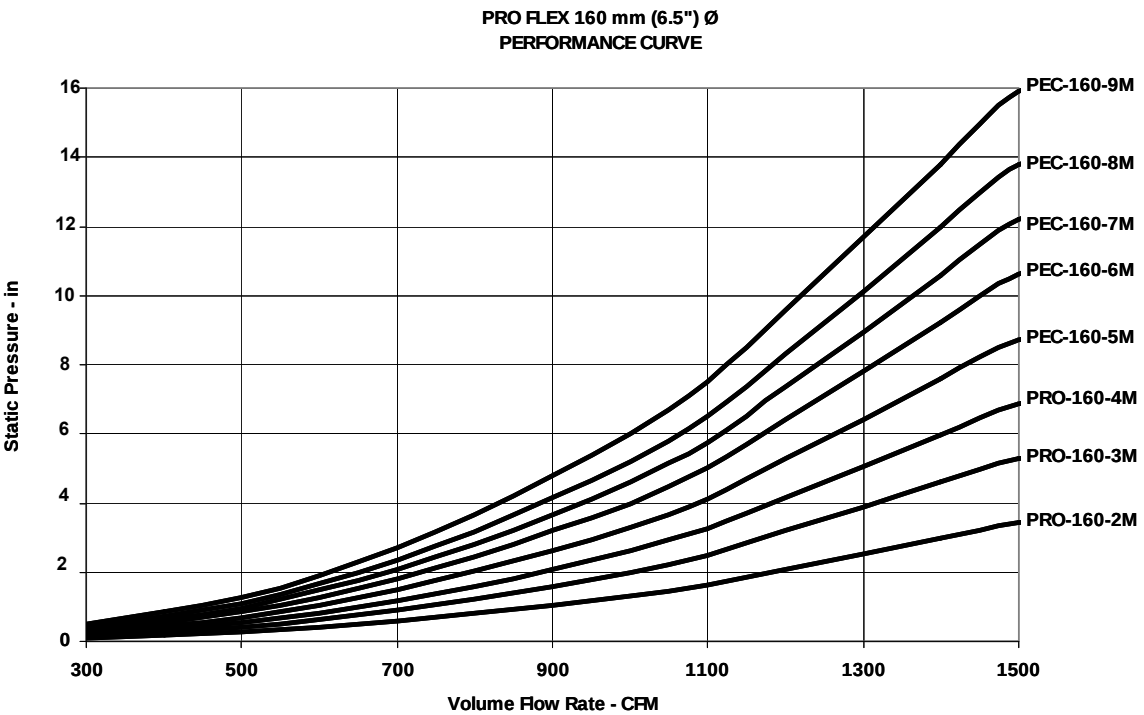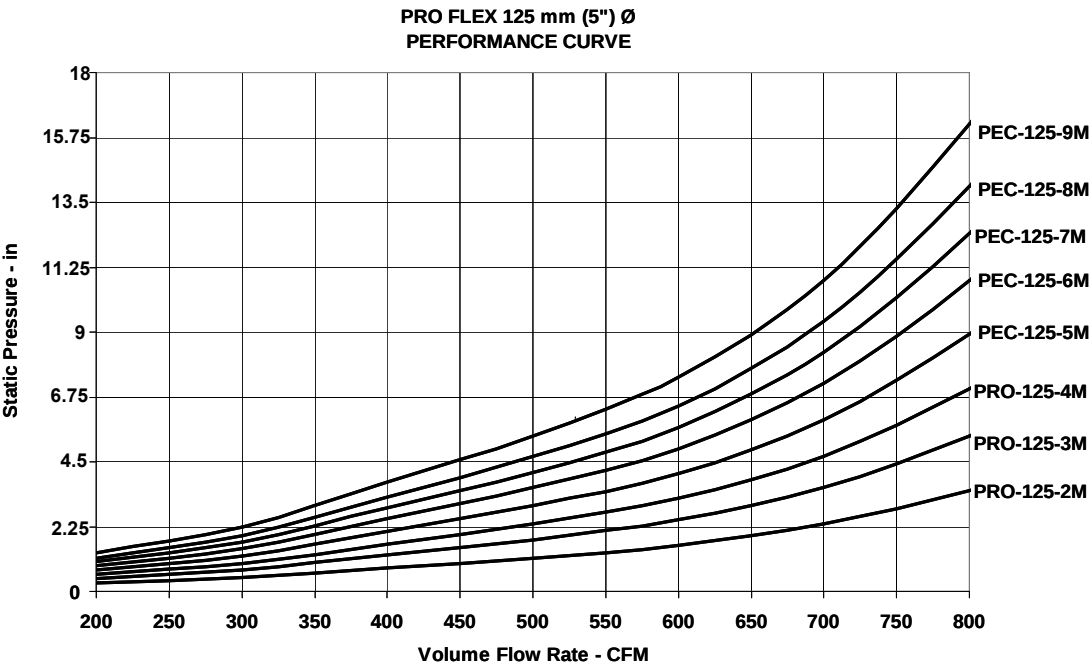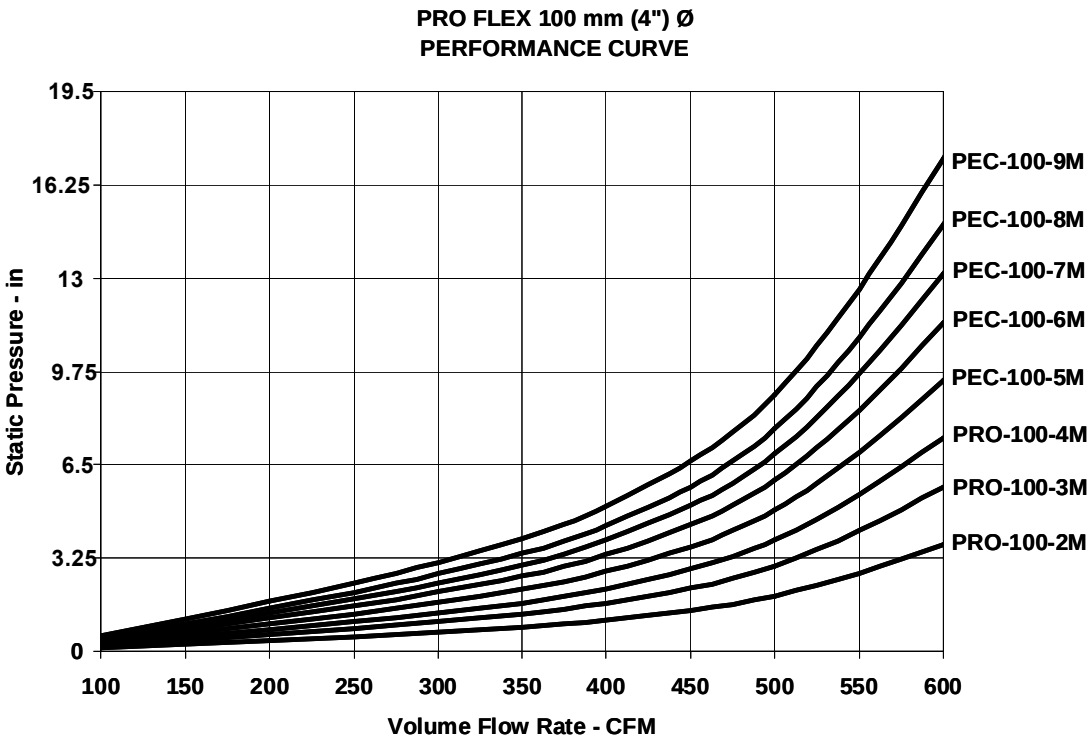

CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:

www.lev-co.com • 1.888.862.5356






The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	Janos B
Date:	1/7/2010
Scale:	NTS
Weight:	N/A



(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit	
Specification Drawing	
Drawing No.: -	File Name: (01-05) Pro-Flex - All Applications
Material: -	Sheet: 6/9

PRO-FLEX ARM WITH P-MAX FAN AND FAN MOUNTING BRACKET

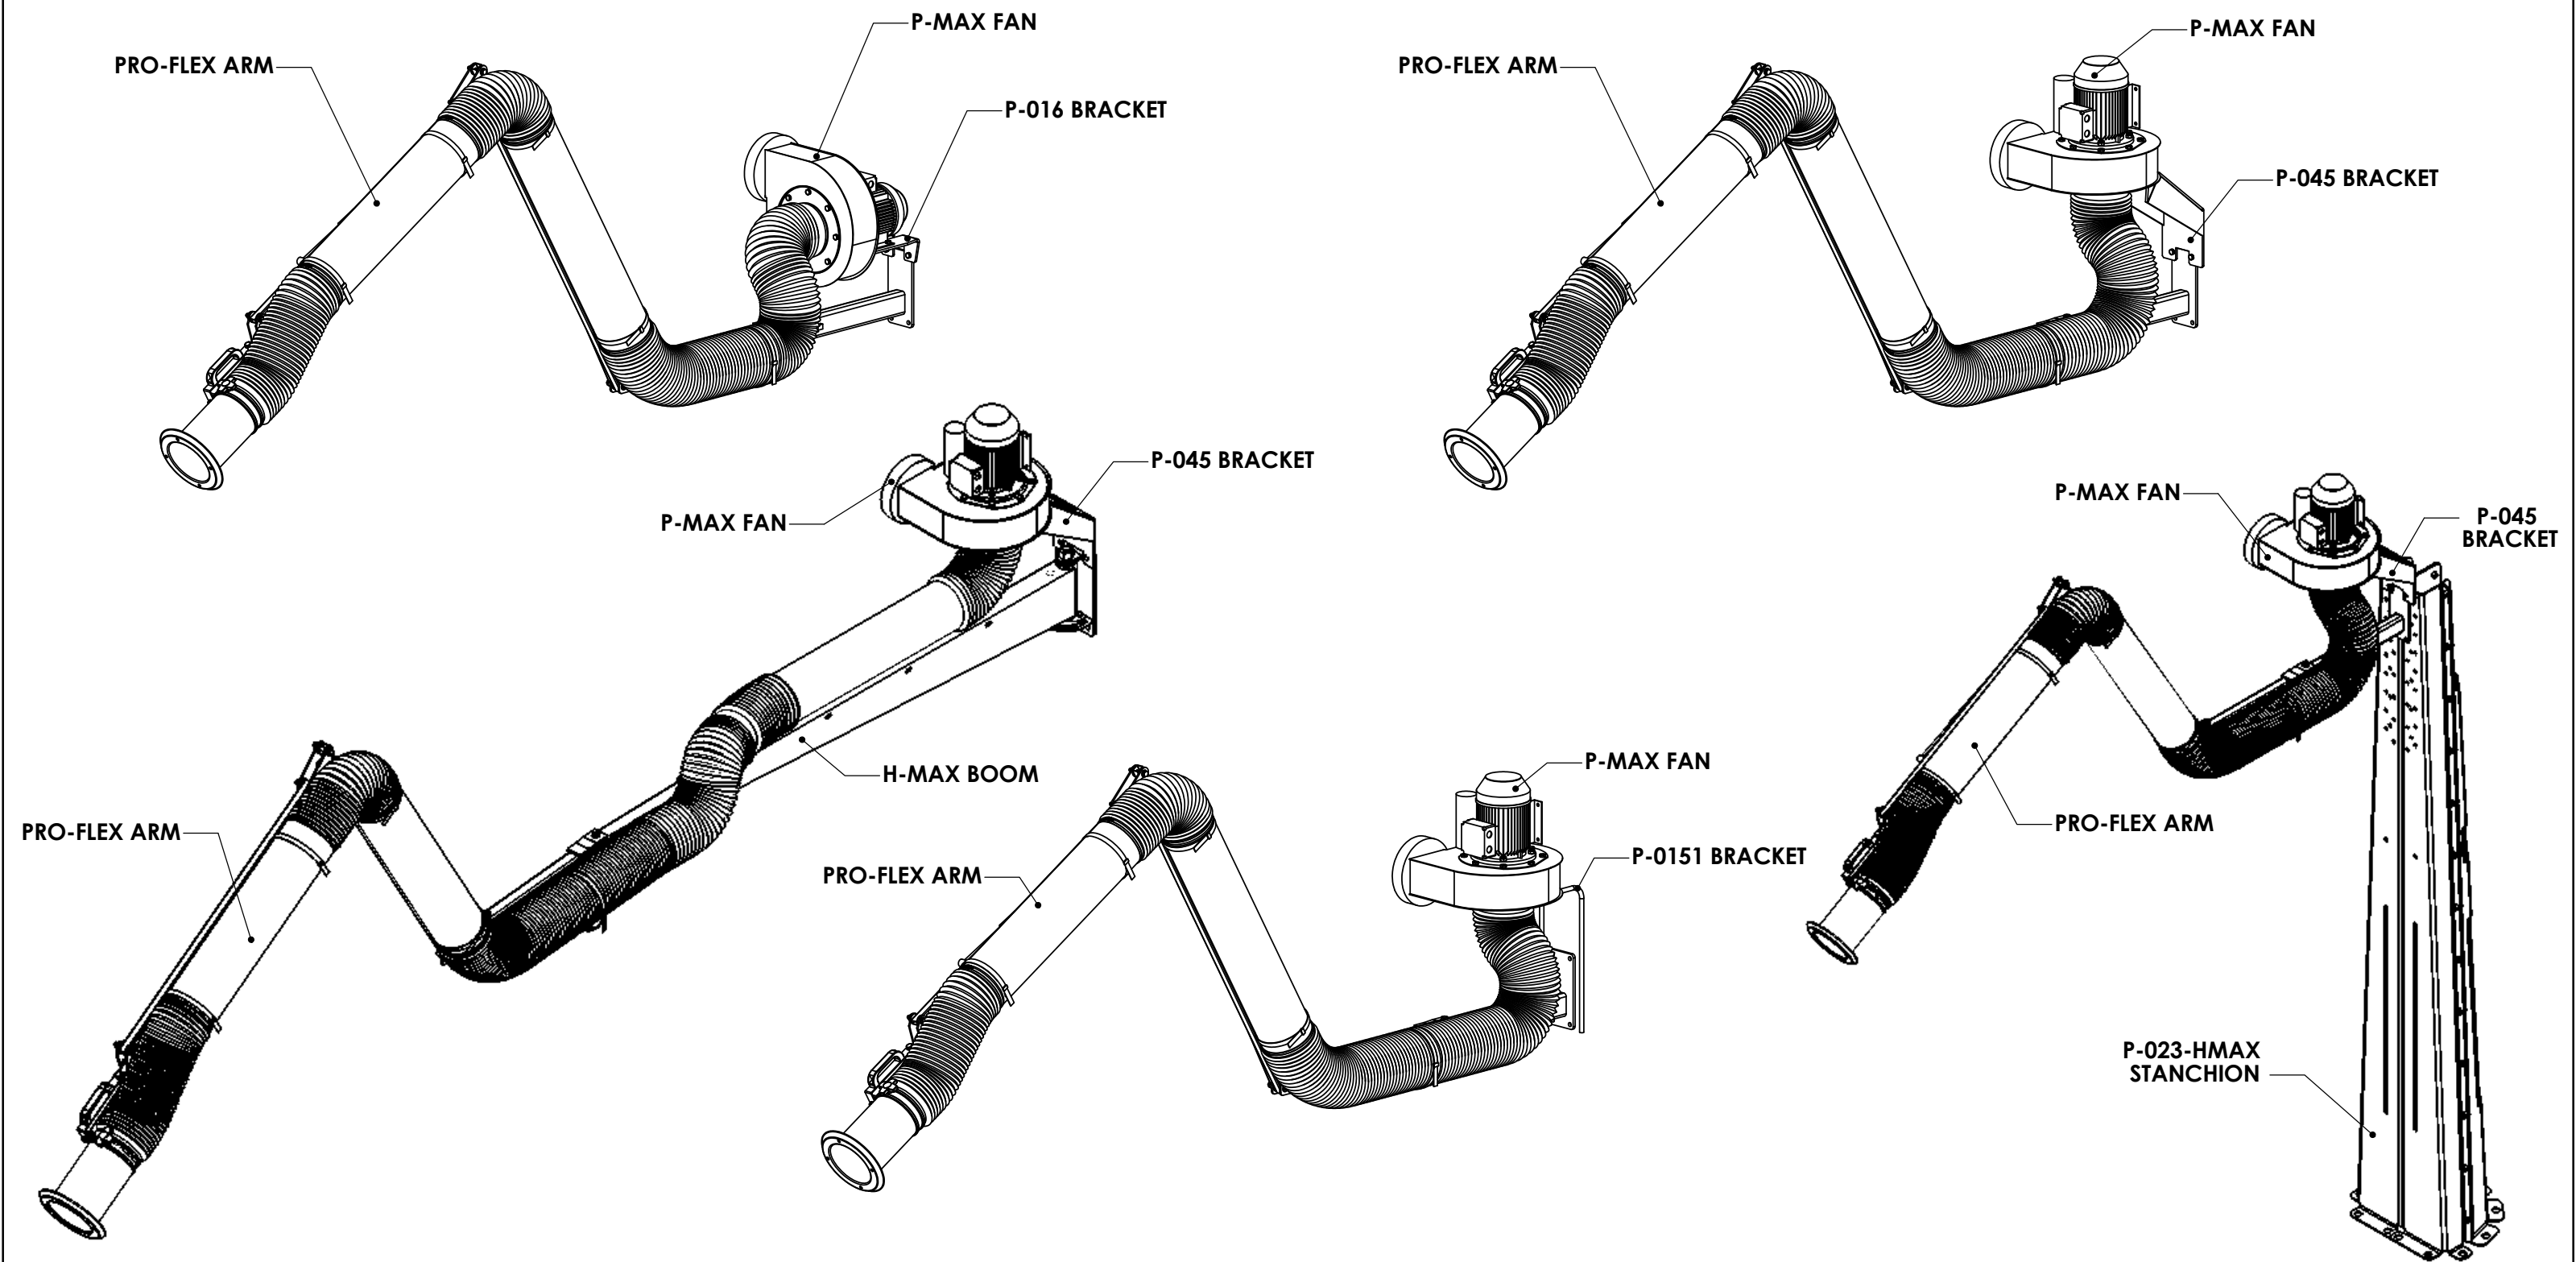


CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:

www.lev-co.com • 1.888.862.5356



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	Janos B
Date:	02/24/2018
Scale:	NTS
Weight:	N/A



(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit	
Specification Drawing	
Drawing No.: -	File Name: (01-05) Pro-Flex - All Applications
Material: -	Sheet: 7/9

MODELS & OPTIONS (Pag 1/2):

Main System - 100mm (4")Ø Pro-Flex Extractor Arms

- ☐
- [PRO-100-2M](#)
- Pro-Flex Extractor Arm 100mm (4")Ø - 2m (6.5')L.

☐[PRO-100-3M](#)

Pro-Flex Extractor Arm 100mm (4")Ø - 3m (10')L.

☐[PRO-100-4M](#)

Pro-Flex Extractor Arm 100mm (4")Ø - 4m (13')L.

☐[PRO-100-5M](#)

5m (16.5') Pro-Flex Extraction Crane 100mm (4")Ø

☐[PRO-100-6M](#)

6m (20') Pro-Flex Extraction Crane 100mm (4")Ø

☐[PRO-100-7M](#)

7m (23') Pro-Flex Extraction Crane 100mm (4")Ø

☐[PRO-100-8M](#)

8m (26') Pro-Flex Extraction Crane 100mm (4")Ø

☐[PRO-100-9M](#)

9m (30') Pro-Flex Extraction Crane 100mm (4")Ø

Main System - 125mm (5")Ø Pro-Flex Extractor Arms

- ☐
- [PRO-125-3M](#)
- Pro-Flex Extractor Arm 125mm (5")Ø - 3m (10')L.

☐[PRO-125-4M](#)

Pro-Flex Extractor Arm 125mm (5")Ø - 2m (6.5')L.

☐[PRO-125-4M](#)

Pro-Flex Extractor Arm 125mm (5")Ø - 4m (13')L.

☐[PRO-125-5M](#)

5m (16.5') Pro-Flex Extraction Crane 125mm (5")Ø.

☐[PRO-125-6M](#)

6m (20') Pro-Flex Extraction Crane 125mm (5")Ø.

☐[PRO-125-7M](#)

7m (23') Pro-Flex Extraction Crane 125mm (5")Ø.

☐[PRO-125-8M](#)

8m (26') Pro-Flex Extraction Crane 125mm (5")Ø.

☐[PRO-125-9M](#)

9m (30') Pro-Flex Extraction Crane 125mm (5")Ø.

Main System - 160mm (6.5")Ø Pro-Flex Extractor Arms

- ☐
- [PRO-160-2M](#)
- Pro-Flex Extractor Arm 160mm (6.5")Ø - 2m (6.5')L.

☐[PRO-160-3M](#)

Pro-Flex Extractor Arm 160mm (6.5")Ø - 3m (10')L.

☐[PRO-160-4M](#)

Pro-Flex Extractor Arm 160mm (6.5")Ø - 4m (13')L.

☐[PRO-160-5M](#)

5m (16.5') Pro-Flex Extraction Crane 160mm (6.5")Ø.

☐[PRO-160-6M](#)

6m (20') Pro-Flex Extraction Crane 160mm (6.5")Ø.

☐[PRO-160-7M](#)

7m (23') Pro-Flex Extraction Crane 160mm (6.5")Ø.

☐[PRO-160-8M](#)

8m (26') Pro-Flex Extraction Crane 160mm (6.5")Ø.

☐[PRO-160-9M](#)

9m (30') Pro-Flex Extraction Crane 160mm (6.5")Ø.

Main System - 200mm (8")Ø Pro-Flex Extractor Arms

- ☐
- [PRO-200-2M](#)
- Pro-Flex Extractor Arm 200mm (8")Ø - 2m (6.5')L.

☐[PRO-200-3M](#)

Pro-Flex Extractor Arm 200mm (8")Ø - 3m (10')L.

☐[PRO-200-4M](#)

Pro-Flex Extractor Arm 200mm (8")Ø - 4m (13')L.

☐[PRO-200-5M](#)

5m (16.5') Pro-Flex Extraction Crane 200mm (8")Ø.

☐[PRO-200-6M](#)

6m (20') Pro-Flex Extraction Crane 200mm (8")Ø.

☐[PRO-200-7M](#)

7m (23') Pro-Flex Extraction Crane 200mm (8")Ø.

☐[PRO-200-8M](#)

8m (26') Pro-Flex Extraction Crane 200mm (8")Ø.

☐[PRO-200-9M](#)

9m (30') Pro-Flex Extraction Crane 200mm (8")Ø.

Direct Mount Fans - 0.5 HP - (Motor Starter not included)

- ☐
- [P-147-1](#)
- P-Max direct drive fan 0.5 HP **115V/1/60**.

☐[P-147-2](#)P-Max direct drive fan 0.5 HP **208-230V/1/60**☐[P-147-3](#)P-Max direct drive fan 0.5 HP **230-460V/3/60**.☐[P-147-4](#)P-Max direct drive fan 0.5 HP **575V/3/60**.

Direct Mount Fans - 1.0 HP - (Motor Starter not included)

- ☐
- [P-149-1](#)
- P-Max© direct drive fan 1 HP **115/1/60**

☐[P-149-2](#)P-Max© direct drive fan 1 HP **208-230/460/3/60**☐[P-149-3](#)P-Max© direct drive fan 1 HP **575-600/3/60**

Direct Mount Fans - 1.5 HP - (Motor Starter not included)

- ☐
- [P-152-1](#)
- P-Max© direct drive fan 1.5 HP **115/230/1/60**

☐[P-152-2](#)P-Max© direct drive fan 2.0 HP **208-230/460/3/60**☐[P-152-3](#)P-Max© direct drive fan 2.0 HP **575-600V/3/60**

Direct Mount Fans - 2.0 HP - (Motor Starter not included)

- ☐
- [P-153-1](#)
- 2.0 HP direct drive fan **115-230/1/60** with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1200CFM@5" w.g.)

☐[P-153-2](#)2 HP direct drive fan **208-230/460/3/60** with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1200CFM@5" w.g.)☐[P-153-3](#)2 HP direct drive fan **575/3/60** with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1200CFM@5" w.g.)

Direct Mount Fans - 3.0 HP - (Motor Starter not included)

- ☐
- [P-154-1](#)
- 3 HP direct drive fan **208-230/460/3/60** with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1800CFM@5.5" w.g.)

☐[P-154-2](#)3 HP direct drive fan **575/3/60** with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1800CFM@5.5" w.g.)

Direct Mount Fans - 5.0 HP - (Motor Starter not included)

- ☐
- [P-155-1](#)
- 5 HP direct drive fan 208-230/460/3/60 with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1300CFM@10" w.g.)

☐[P-155-2](#)

5 HP direct drive fan 575/3/60 with BI aluminum wheel with self cleaning blades, AMCA type B spark resistance construction (rated for 1300CFM@10" w.g.)

BI (Backward Inclined) Centrally Ducted Fans (Motor Starter not included)

- ☐
- [LD-120-1](#)
- 1300 CFM @ 9" w.g. to 2000 CFM@5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class II c/w 3 HP 230-460V/3/60, 3600 RPM.

☐[LD-120-2](#)

1300 CFM @ 9" w.g. to 2000 CFM @ 5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class II c/w 3 HP 575V/3/60, 3600 RPM.

☐[LD-130-1](#)

2000 CFM@10 " w.g. to 3000 CFM@5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class II c/w 5 HP 230-460V/3/60, 3600 RPM.

☐[LD-130-2](#)2000 CFM@10 " w.g. to 3000 CFM@5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class II c/w 5 HP 575-600V/3/60, 3600 RPM.
* rotation and discharge: CW-UB*☐[LD-150-1](#)

3000 CFM@9" w.g. to 4500 CFM@5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class II c/w 7.5 HP 230-460V/3/60, 3600 RPM.

☐[LD-150-2](#)

3000 CFM@9" w.g. to 4500 CFM@5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class II c/w 7.5 HP 575-600V/3/60, 3600 RPM.

☐[LD-160-1](#)

4000 CFM@10" w.g. to 5000 CFM@6" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 10 HP 230-460V/3/60, 3600 RPM.

☐[LD-160-2](#)

4000 CFM@10" w.g. to 5000 CFM@6" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 10 HP 575V/3/60, 3600 RPM

☐[LD-180-1](#)

5000 CFM@12" w.g. to 7000 CFM@4" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 15 HP 230-460V/3/60, 3600 RPM.

☐[LD-180-2](#)

5000 CFM@12" w.g. to 7000 CFM@4" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 15 HP 575-600V/3/60, 3600 RPM.

☐[LD-180-3](#)

8000 CFM@9" w.g. to 9,500 CFM@6" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 20 HP 230-460V/3/60, 3600 RPM.

☐[LD-180-4](#)

8000 CFM@9" w.g. to 9,500 CFM@6" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 20 HP 575/3/60, 3600 RPM.

☐[LD-240-1](#)

10,000 CFM@7.5" w.g. to 12,000 CFM@5.5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 20 HP 230-460V/3/60, 1750 RPM.

☐[LD-240-2](#)

10,000 CFM@7.5" w.g. to 12,000 CFM@5.5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 20 HP 575V/3/60, 1750 RPM.

☐[LD-270-1](#)

12,000 CFM@8" w.g. to 14,500 CFM@5.5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 25 HP 230/460/3/60, 1750 RPM.

☐[LD-270-2](#)

12,000 CFM@8" w.g. to 14,500 CFM@5.5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 25 HP 575V/3/60, 1750 RPM.

☐[LD-270-3](#)

14,000 CFM@8" w.g. to 17,000 CFM@5.5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 30 HP 230/460/3/60, 1750 RPM.

☐[LD-270-4](#)

14,000 CFM@8" w.g. to 17,000 CFM@5.5" w.g. BI Direct Drive Fan c/w slip fit inlet, flanged outlet; Class IV c/w 30 HP 575V/3/60, 1750 RPM.

CUSTOMER:

CUSTOMER P.O.:

PROJECT:

ENGINEER:

SALES REP.:

IDENTIFICATION / TAGGING:

> www.lev-co.com • 1.888.862.5356

lev-co

The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: Janos B

Date: 1/7/2010

Scale: NTS

Weight: N/A

(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit

Specification Drawing

Drawing No.: -

File Name: (01-05) Pro-Flex - All Applications

Material: -

Sheet: 8/9

DUST COLLECTION • FUME EXTRACTION • OIL MIST FILTRATION • VEHICLE EXHAUST

01-05

MODELS & OPTIONS (Pag 2/2):

Hood Options		
☐	ARM-LTK50	Light Kit for extraction arms. Comes c/w Hood mounted 50W halogen light, debris screen, hood mounted ON/OFF switch, cable, 120V transformer and 25Ft. of power cord.
☐	SM-100	Safety mesh for 100mm (4")Ø hood.
☐	SM-125	Safety mesh for 125mm (5")Ø hood.
☐	SM-160	Safety mesh for 160mm (6.5")Ø hood.
☐	SM-200	Safety mesh for 200mm (8")Ø hood.
Hose Guard - For High Sparking applications such as Plasma Cutting		
☐	HS-2500-160	2500 °F Hose Shield for all 6" & 6.5" ø hoses. 30" in length
☐	HS-2500-200	2500 °F Hose Shield for all 8" ø hoses. 30" in length
Hose, Hood & Nozzle Options		
☐	REC-H-6	Conical receiving hood Ø6"
☐	REC-H-8	Conical receiving hood Ø8"
Stanchions & Wall Brackets		
☐	P-021	Ceiling/floor stanchion 1m (3.3') for Flexi and Pro-Flex Extraction Arms
☐	P-022	Ceiling/floor stanchion 2m (6.5') for Flexi and Pro-Flex Extraction Arms
☐	P-023	Ceiling/floor stanchion 3m (10') for Flexi and Pro-Flex Extraction Arms
Extension Hoses C/W Magnetic Nozzles		
☐	LEV-P-018-160-2MAG	10' long 6.5" 250 deg. hose, hood & 2 magnets
☐	LEV-P-018-160-4MAG	10' long 6.5" 250 deg. hose, hood & 4 magnets
☐	LEV-P-018-200-2MAG	10' long 8" 250 deg. hose, hood & 2 magnets
☐	LEV-P-018-200-4MAG	10' long 8" 250 deg. hose, hood & 4 magnets
Installation Accessories		
☐	PDK-8	Industrial grade duct kit for direct exhausting of P-Max fans - for Wall exhaust
☐	PDK-RF-8	Industrial grade duct kit for direct exhausting of P-Max fans - for Ceiling/Roof exhaust

Fan Control Panels (when ordering main unit)		
☐	P-024-1	115V/1/60 Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection on/off 14A control power cord and plug. Overload rating according to the FLA of the motor. Field assembly & installation required.
☐	P-024-2	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 0.6-1.0A OVERLOAD---> HP rating: 1/4@230/3/60, 1/2@460/3/60, 1/2@575/3/60
☐	P-024-3	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 1-1.6A OVERLOAD ---> HP rating: 1/3@230/3/60. 3/4@460/3/60, 1.0@575/3/60
☐	P-024-4	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 1.6-2.5A OVERLOAD ---> HP rating: 1/2@230/3/60, 1.0@460/3/60, 1.5@575/3/60
☐	P-024-5	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 2.5-4A OVERLOAD---> HP rating: 1.0@230/3/60, 2.0@4603/60, 3.0@575/3/60
☐	P-024-6	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 4.0-6.3A OVERLOAD---> HP rating: 0.25@115/1/60, 0.5@230/1/60, 1.5@230/3/60, 3/0@460/3/60, 5.0@575/3/60
☐	P-024-7	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 6.0-10A OVERLOAD---> HP rating: 0.5@115/1/60, 1.5@230/1/60, 3.0@230/3/60, 5.0@460/3/60, 7.5@575/3/60V
☐	P-024-8	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 10-16A OVERLOAD---> HP rating: 1.0@115/1/60, 2.0@230/1/60, 5.0@230/3/60, 10@460/3/60, 10@575/3/60V
☐	P-024-9	Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection and on/off control. 16-20A OVERLOAD---> HP rating: 1.5@115/1/60, 3.0@230/1/60, 7.5.0@230/3/60, 15@460/3/60, 15@575/3/60V
Fan Mounting Brackets		
☐	P-016	P-Max Fan mounting bracket for Pro-Flex & Supermax Extraction Arms.
☐	P-045	P-MAX fan mount bracket c/w swivel.For P-Max fan on H-Max Ext.Boom for Flexi-I,Pro-Flex Extr.Crane(4",5",6.5"),VE Ext.Boom for HoseReels&Hose Drops &VE articulating Crane for HoseDrops (4",5",6")
☐	P-151	P-MAX fan mounting bracket c/w swivel. To be used to install a P-Max fan on a H-Max Extension Boom for Flexi-II and E-Z Arm , Pro-Flex Extraction Crane (8" dia.), VE Extension Boom for Hose Reels&Hose Drops (8" dia.) and VE articulating Crane for Hose Drop

CUSTOMER:

CUSTOMER P.O.:

PROJECT:

ENGINEER:

SALES REP.:

IDENTIFICATION / TAGGING:




The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: Janos B

Date: 1/7/2010

Scale: NTS

Weight: N/A



(01-05) Pro-Flex - All Applications to 30' - Externally Supported - Diameter & Flow to suit

Specification Drawing

Drawing No.: -

File Name: (01-05) Pro-Flex - All Applications

Material: -

Sheet: 9/9

DUST COLLECTION • FUME EXTRACTION • OIL MIST FILTRATION • VEHICLE EXHAUST

01-05