


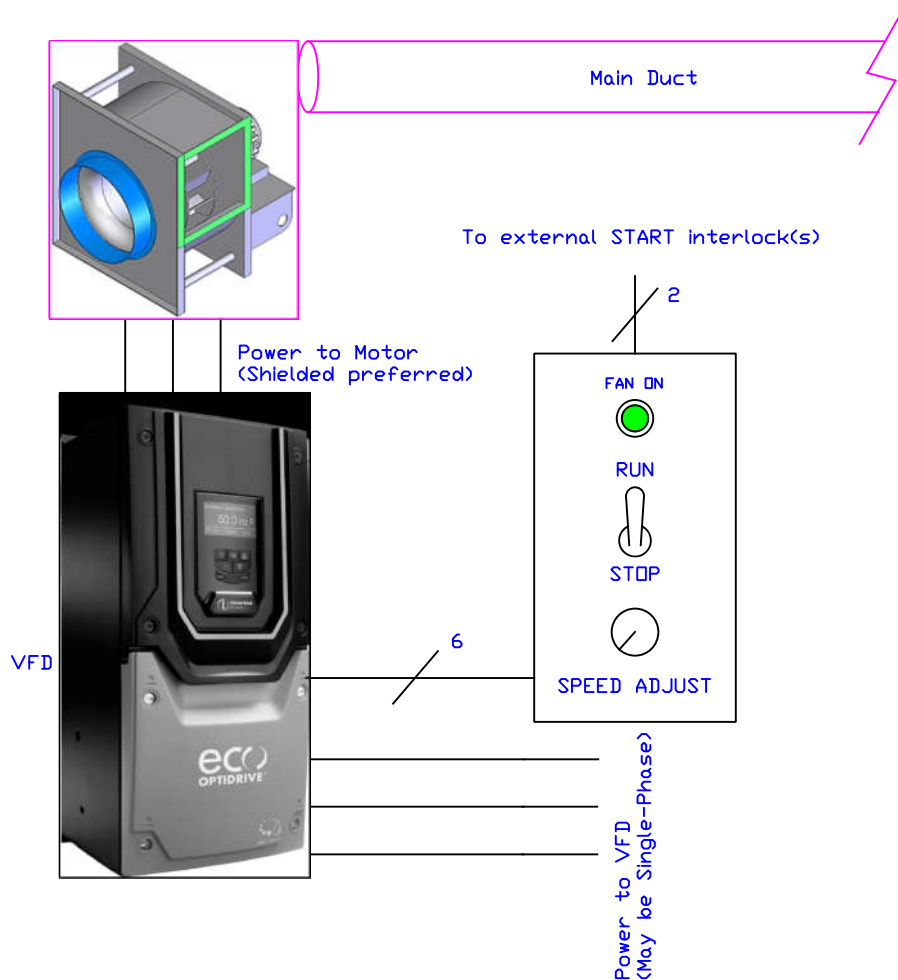

GENERAL SPECIFICATIONS

TYPE OF CONTROL:	FAN MOTOR - ON/OFF TOGGLE SWITCH VFD MOTOR DRIVE SPEED ADJUSTMENT POTENTIOMETER
INPUT:	SINGLE PHASE 240V 60HZ THREE PHASE 220 - 600V 60HZ
INTERLOCKS:	START INTERLOCK MAY INCLUDE DAMPER OR HOSE REEL SWITCHES, AMU, ETC.
MOTOR CAPACITIES:	FRACTIONAL TO 60HP
INDICATORS:	FAN MOTOR ON
PROTECTION:	PROVIDED MOTOR OVERLOAD PROTECTION
ENCLOSURE:	CONTROL PANEL RATING: NEMA 4/12 IP56/52 VFD RATING IP55/66
OPTIONS:	MAIN CIRCUIT DISCONNECT (FUSED OR UNFUSED) EXTERNAL CONTACTS FOR FAN ON, ETC.
NOTE:	LEV-CO RECOMMENDS A 120 - 480 SECOND ACCELERATION RAMP TIME WHEN INTERLOCKING AN AIR MAKE-UP UNIT OR FRESH AIR DAMPER

CUSTOMER:	
CUSTOMER P.O.:	
PROJECT:	
ENGINEER:	
SALES REP:	
IDENTIFICATION / TAGGING:	

> www.lev-co.com • 1.888.862.5356

lev-co

The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	F. Gasol
Date:	2016-06-20
Scale:	NTS
Weight:	N/A

VFD EXHAUST SYSTEM

Spec. Drawing - Type 1

Draining Flow	-	File Name	CP13-12-SPC-01	Sheet	1/1
Materials	-				